



## Flexible LED Strip



• CRI up to 90

• Binning +/- 75K

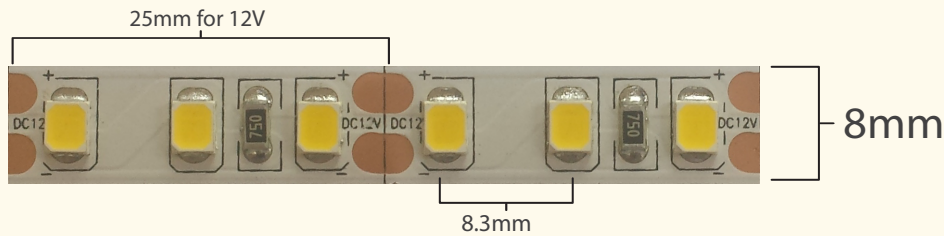

## Electrical specification

Power per meter	24Watt/meter
CCT option	2700K / 3000K / 4000K / 6000K
CRI option	70 / 80 / 90
LED Quality per meter	2835 LED 120 pcs per meter
Voltage option	12V DC / 24V DC
LED Current	60mA
Order Unit	5000mm
Cutting Unit	25mm@12V/50mm@24V
Max. Casing temperature	Tc 70 °C
Max. Ambient temperature	Ta 40 °C


12V DC IP65

CRI 70 CRI 80 CRI 90

## Model No.


LT2835120	-	*	-	*	-	*
Product Name	-	CRI&CCT	-	Voltage	-	IP Level
LED Strip, 120pcs 2835 per meter	-	827:CRI80 2700K 830:CRI80 3000K 840:CRI80 4000K 860:CRI80 6000K 927:CRI90 2700K 930:CRI90 3000K 940:CRI90 4000K	-	12: 12V DC 24: 24V DC	-	20: NoIP 65: IP65

## Flexible LED Strip



• CRI up to 90

• Binning +/- 75K

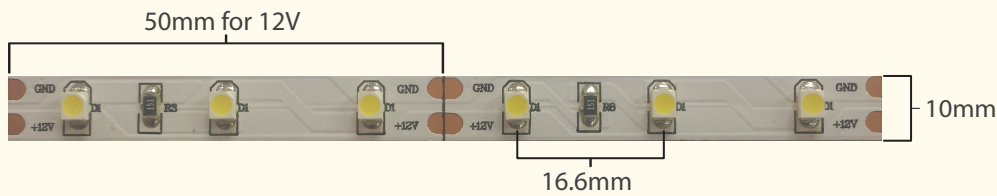

## Electrical specification


Power per meter	4.8Watt/meter
CCT option	2700K / 3000K / 4000K / 6000K
CRI option	70 / 80 / 90
LED Quality per meter	3528 LED 60 pcs per meter
Voltage option	12V DC / 24V DC
LED Current	20mA
Order Unit	5000mm
Cutting Unit	50mm@12V / 100mm@24V
Max. Casing temperature	Tc 70 °C
Max. Ambient temperature	Ta 40 °C

12V DC	IP65
CRI 70	CRI 80

## Model No.


LT352860	-	*	-	*	-	*
Product Name	-	CRI&CCT	-	Voltage	-	IP Level
LED Strip, 60pcs 3528 per meter		827:CRI80 2700K 830:CRI80 3000K 840:CRI80 4000K 860:CRI80 6000K 927:CRI90 2700K 930:CRI90 3000K 940:CRI90 4000K		12: 12V DC 24: 24V DC		20: NoIP 65: IP65

## Flexible LED Strip



• CRI up to 90

• Binning +/- 75K

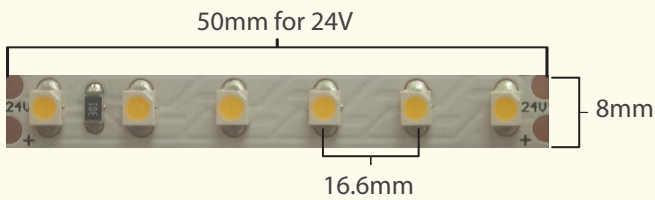

## Electrical specification

Power per meter	9.6Watt/meter
CCT option	2700K / 3000K / 4000K / 6000K
CRI option	70 / 80 / 90
LED Quality per meter	3528 LED 120 pcs per meter
Voltage option	12V DC / 24V DC
LED Current	20mA
Order Unit	5000mm
Cutting Unit	50mm@12V / 100mm@24V
Max. Casing temperature	Tc 70 °C
Max. Ambient temperature	Ta 40 °C

12V DC 24V DC


IP65

CRI 70 CRI 80 CRI 90


## Model No.

LT3528120	-	*	-	*	-	*
Product Name	-	CRI&CCT	-	Voltage	-	IP Level
LED Strip,120pcs 3528 per meter	-	827:CRI80 2700K 830:CRI80 3000K 840:CRI80 4000K 860:CRI80 6000K 927:CRI90 2700K 930:CRI90 3000K 940:CRI90 4000K	-	12: 12V DC 24: 24V DC	-	20: NoIP 65: IP65

## Flexible LED Strip



- CRI up to 90
- Binning +/- 75K

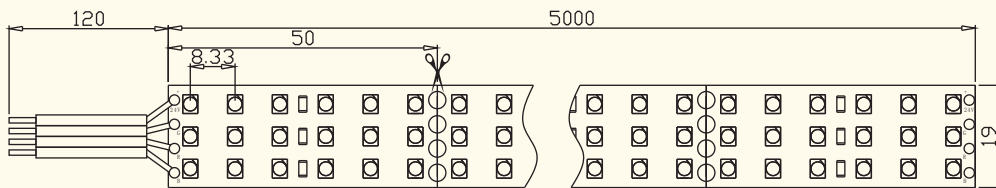

## Electrical specification

Power per meter	28.8Watt/meter
CCT option	2700K / 3000K / 4000K / 6000K
CRI option	70 / 80 / 90
LED Quality per meter	60pcs Red , 60pcs Green, 60pcs Blue
Voltage option	24V DC
LED Current	20mA
Order Unit	5000mm
Cutting Unit	50mm@24V
Max. Casing temperature	Tc 70 °C
Max. Ambient temperature	Ta 40 °C

12V DC 24V DC


IP65

CRI 70 CRI 80 CRI 90

## Model No.


LT3528120-RGB	-	*	-	*	-	*
Product Name	-	RGB	-	Voltage	-	IP Level
LED Strip,120pcs 3528 per meter		RGB LED		12: 12V DC 24: 24V DC		20: NoIP 65: IP65

## Flexible LED Strip



• CRI up to 90

• Binning +/- 75K

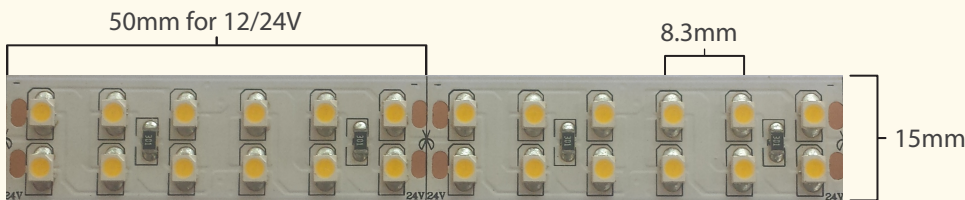

## Electrical specification

Power per meter	19.2Watt/meter
CCT option	2700K / 3000K / 4000K / 6000K
CRI option	70 / 80 / 90
LED Quality per meter	3528 LED 240 pcs per meter
Voltage option	24V DC
LED Current	20mA
Order Unit	5000mm
Cutting Unit	50mm@24V
Max. Casing temperature	Tc 70 °C
Max. Ambient temperature	Ta 40 °C

24V  
DC

IP65

CRI  
70

CRI  
80


CRI  
90

## Model No.

LT3528240 - \* - \* - \*

Product Name	CRI&CCT	Voltage	IP Level
LED Strip, 240pcs 3528 per meter	827:CRI80 2700K 830:CRI80 3000K 840:CRI80 4000K 860:CRI80 6000K 927:CRI90 2700K 930:CRI90 3000K 940:CRI90 4000K	12: 12V DC 24: 24V DC	20: NoIP 65: IP65


## Flexible LED Strip



• CRI up to 90

• Binning +/- 75K

100mm for 12V

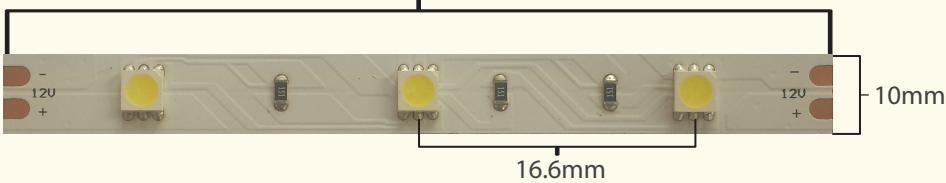

## Electrical specification

Power per meter	7.2Watt/meter
CCT option	2700K / 3000K / 4000K / 6000K
CRI option	70 / 80 / 90
LED Quality per meter	5050 LED 30 pcs per meter
Voltage option	12V DC
LED Current	60mA
Order Unit	5000mm
Cutting Unit	100mm@12V
Max. Casing temperature	Tc 70 °C
Max. Ambient temperature	Ta 40 °C


12V DC IP65

CRI 70 CRI 80 CRI 90

## Model No.


LT505060	-	*	-	*	-	*
Product Name	-	CRI&CCT	-	Voltage	-	IP Level
LED Strip, 30pcs 5050 per meter	-	827:CRI80 2700K 830:CRI80 3000K 840:CRI80 4000K 860:CRI80 6000K 927:CRI90 2700K 930:CRI90 3000K 940:CRI90 4000K	-	12: 12V DC	-	20: NoIP 65: IP65

## Flexible LED Strip



• CRI up to 90

• Binning +/- 75K

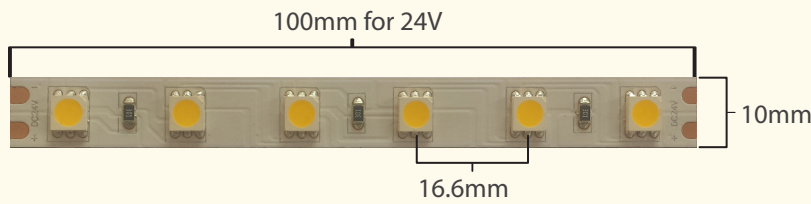

## Electrical specification

Power per meter	14.4Watt/meter
CCT option	2700K / 3000K / 4000K / 6000K
CRI option	70 / 80 / 90
LED Quality per meter	5050 LED 60 pcs per meter
Voltage option	12V DC / 24V DC
LED Current	60mA
Order Unit	5000mm
Cutting Unit	50mm@12V / 100mm@24V
Max. Casing temperature	Tc 70 °C
Max. Ambient temperature	Ta 40 °C

12V  
DC

24V  
DC

IP65

CRI  
70


CRI  
80

CRI  
90

## Model No.


LT505060	-	*	-	*	-	*
Product Name	-	CRI&CCT	-	Voltage	-	IP Level
LED Strip, 60pcs 5050 per meter		827:CRI80 2700K 830:CRI80 3000K 840:CRI80 4000K 860:CRI80 6000K 927:CRI90 2700K 930:CRI90 3000K 940:CRI90 4000K		12: 12V DC 24: 24V DC		20: NoIP 65: IP65

## Flexible LED Strip



• CRI up to 90

• Binning +/- 75K

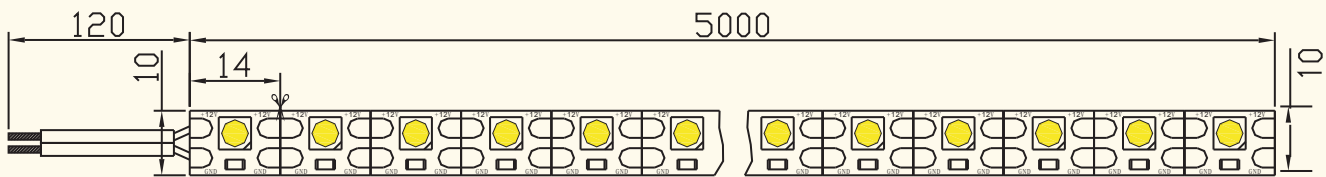

## Electrical specification

Power per meter	17.3Watt/meter
CCT option	2700K / 3000K / 4000K / 6000K
CRI option	70 / 80 / 90
LED Quality per meter	5050 LED 72 pcs per meter
Voltage option	12V DC
LED Current	60mA
Order Unit	5000mm
Cutting Unit	14mm@12V
Max. Casing temperature	Tc 70 °C
Max. Ambient temperature	Ta 40 °C

12V  
DC

IP65

CRI  
70

CRI  
80


CRI  
90

## Model No.

LT505072	-	*	-	*	-	*
Product Name	-	CRI&CCT	-	Voltage	-	IP Level
LED Strip, 72pcs 5050 per meter	-	827:CRI80 2700K 830:CRI80 3000K 840:CRI80 4000K 860:CRI80 6000K 927:CRI90 2700K 930:CRI90 3000K 940:CRI90 4000K	-	12: 12V DC 24: 24V DC	-	20: NoIP 65: IP65




## Flexible LED Strip



• CRI up to 90

• Binning +/- 75K

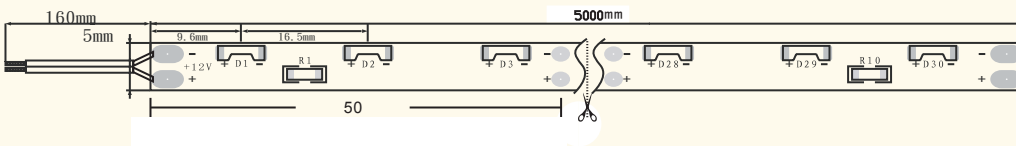

## Electrical specification


Power per meter	4.8Watt/meter
CCT option	2700K / 3000K / 4000K / 6000K
CRI option	70 / 80 / 90
LED Quality per meter	335 LED 60 pcs per meter
Voltage option	12V DC / 24V DC
LED Current	20mA
Order Unit	5000mm
Cutting Unit	50mm@12V / 100mm@24V
Max. Casing temperature	Tc 70 °C
Max. Ambient temperature	Ta 40 °C

12V DC	IP65
CRI 70	CRI 80

## Model No.


LT033560	-	*	-	*	-	*
Product Name	-	CRI&CCT	-	Voltage	-	IP Level
LED Strip, 60pcs 335 per meter	-	827:CRI80 2700K 830:CRI80 3000K 840:CRI80 4000K 860:CRI80 6000K 927:CRI90 2700K 930:CRI90 3000K 940:CRI90 4000K	-	12: 12V DC 24: 24V DC	-	20: NoIP 65: IP65

## Flexible LED Strip



• CRI up to 90

• Binning +/- 75K

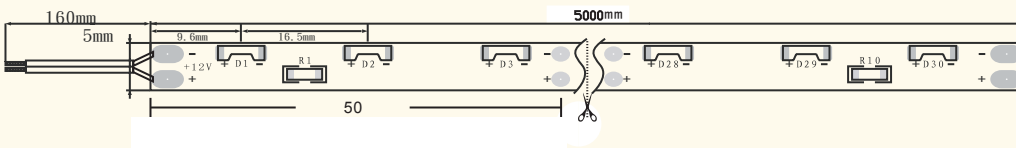

## Electrical specification


Power per meter	4.8Watt/meter
CCT option	2700K / 3000K / 4000K / 6000K
CRI option	70 / 80 / 90
LED Quality per meter	335 LED 60 pcs per meter
Voltage option	12V DC / 24V DC
LED Current	20mA
Order Unit	5000mm
Cutting Unit	50mm@12V / 100mm@24V
Max. Casing temperature	Tc 70 °C
Max. Ambient temperature	Ta 40 °C

12V DC	IP65
CRI 70	CRI 80

## Model No.


LT033560	-	*	-	*	-	*
Product Name	-	CRI&CCT	-	Voltage	-	IP Level
LED Strip, 60pcs 335 per meter	-	827:CRI80 2700K 830:CRI80 3000K 840:CRI80 4000K 860:CRI80 6000K 927:CRI90 2700K 930:CRI90 3000K 940:CRI90 4000K	-	12: 12V DC 24: 24V DC	-	20: NoIP 65: IP65

## Flexible LED Strip



• CRI up to 90

• Binning +/- 75K



## Electrical specification

Power per meter	9.6Watt/meter
CCT option	2700K / 3000K / 4000K / 6000K
CRI option	70 / 80 / 90
LED Quality per meter	335 LED 120 pcs per meter
Voltage option	24V DC
LED Current	20mA
Order Unit	5000mm
Cutting Unit	50mm@24V
Max. Casing temperature	Tc 70 °C
Max. Ambient temperature	Ta 40 °C

24V  
DC

IP65


CRI  
70

CRI  
80

## Model No.


LT0335120	-	*	-	*	-	*
Product Name	-	CRI&CCT	-	Voltage	-	IP Level
LED Strip,120pcs 335 per meter	-	827:CRI80 2700K 830:CRI80 3000K 840:CRI80 4000K 860:CRI80 6000K 927:CRI90 2700K 930:CRI90 3000K 940:CRI90 4000K	-	12: 12V DC 24: 24V DC	-	20: NoIP 65: IP65

## Flexible LED Strip



• CRI up to 90

• Binning +/- 75K

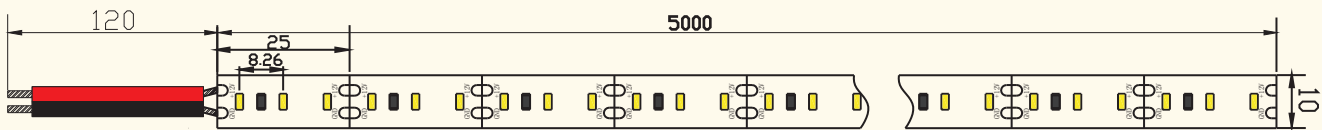

## Electrical specification

Power per meter	14.4Watt/meter
CCT option	2700K / 3000K / 4000K / 6000K
CRI option	70 / 80 / 90
LED Quality per meter	3014 LED 120 pcs per meter
Voltage option	12V DC / 24V DC
LED Current	30mA
Order Unit	5000mm
Cutting Unit	25mm@12V / 50mm@24V
Max. Casing temperature	Tc 70 °C
Max. Ambient temperature	Ta 40 °C

12V DC 24V DC


IP65

CRI 70 CRI 80 CRI 90

## Model No.


LT3014120	-	*	-	*	-	*
Product Name	-	CRI&CCT	-	Voltage	-	IP Level
LED Strip, 120pcs 3014 per meter	-	827:CRI80 2700K 830:CRI80 3000K 840:CRI80 4000K 860:CRI80 6000K 927:CRI90 2700K 930:CRI90 3000K 940:CRI90 4000K	-	12: 12V DC 24: 24V DC	-	20: NoIP 65: IP65

## Flexible LED Strip



• CRI up to 90

• Binning +/- 75K

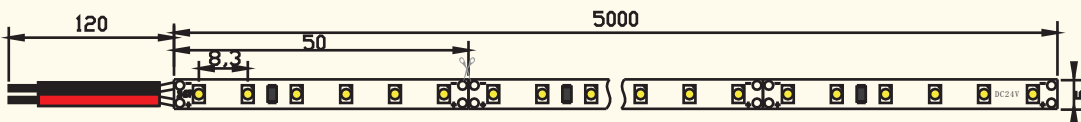

## Electrical specification

Power per meter	9.6Watt/meter
CCT option	2700K / 3000K / 4000K / 6000K
CRI option	70 / 80 / 90
LED Quality per meter	3020 LED 120 pcs per meter
Voltage option	24V DC
LED Current	20mA
Order Unit	5000mm
Cutting Unit	50mm@24V
Max. Casing temperature	Tc 70 °C
Max. Ambient temperature	Ta 40 °C

12V DC 24V DC

IP65



CRI 70 CRI 80 CRI 90

## Model No.

LT3020120 - \* - \* - \*

Product Name	CRI&CCT	Voltage	IP Level
LED Strip, 120pcs 3020 per meter	827:CRI80 2700K 830:CRI80 3000K 840:CRI80 4000K 860:CRI80 6000K 927:CRI90 2700K 930:CRI90 3000K 940:CRI90 4000K	12: 12V DC 24: 24V DC	20: NoIP 65: IP65

## Flexible LED Strip

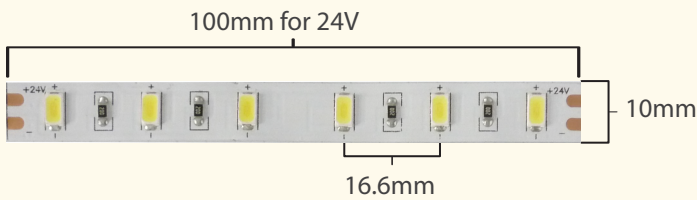

• CRI up to 90

• Binning +/- 75K

## Electrical specification

Power per meter	14.4Watt/meter
CCT option	2700K / 3000K / 4000K / 6000K
CRI option	70 / 80 / 90
LED Quality per meter	5630 LED 60 pcs per meter
Voltage option	24V DC
LED Current	60mA
Order Unit	5000mm
Cutting Unit	50mm@12V / 100mm@24V
Max. Casing temperature	Tc 70 °C
Max. Ambient temperature	Ta 40 °C

12V DC 24V DC

IP65

CRI 70 CRI 80 CRI 90

## Model No.

LT3528120	-	*	-	*	-	*
Product Name	-	CRI&CCT	-	Voltage	-	IP Level
LED Strip,60pcs 5630 per meter		827:CRI80 2700K 830:CRI80 3000K 840:CRI80 4000K 860:CRI80 6000K 927:CRI90 2700K 930:CRI90 3000K 940:CRI90 4000K		12: 12V DC 24: 24V DC		20: NoIP 65: IP65